



FAIR FRIEND • ENGINEERING • EXCELLENCE • LEADERSHIP • EXPERTISE • RELIABILITY



**HEADQUARTERS**  
No. 186, Yong Chi Road, Taipei, Taiwan.  
Tel: +886-2-2763-9696  
Fax: +886-2-2768-0636/37/39  
http://www.ffg-tw.com  
E-mail: chairom@fairfriend.com.tw



**FEELER MACHINE TOOLS DIVISION**  
No. 12, Jingke Rd., Nantun Dist., Taichung City, Taiwan  
Tel: +886-4-2359-4075 (MAIN), 2359-4845 (SALES DEP.)  
Fax: +886-4-2359-4873  
http://www.feeler.com  
E-mail: sales@feeler.com



[www.feeler.com](http://www.feeler.com)



# VMP *SERIES*

## Vertical Machining Center

# FEELER VMP SERIES

## Vertical Machining Center Provides State-of-the-art Efficiency For Increased Profitability


Whether you require in high precision parts machining or general mold making, Fair Friend new VMP-Series Vertical Machining Centers offer unbeatable dependability.

The VMP-Series is a well-engineered high precision unit, making it ideal for various precision industrial requirements. It promises dramatic productivity gains with many integrated features. Its rugged construction is manufactured from high quality cast iron, assuring optimum rigidity and stability for years of dependable operation. Machine structure design is subject to ANSYS and NASTRAN Finite Element Analysis to achieve the highest standards of machine accuracy and reliability.

Reinforced A-shape column bottom is combined with massive base for extra rigid support. 10,000 rpm spindle speed produces the fine surface effect required by precision mold. With the points above and more excellent features combination, you get the most competitive edge for your precision jobs



# Perfected structure design brings you lifetime accuracy, rigidity and stability !


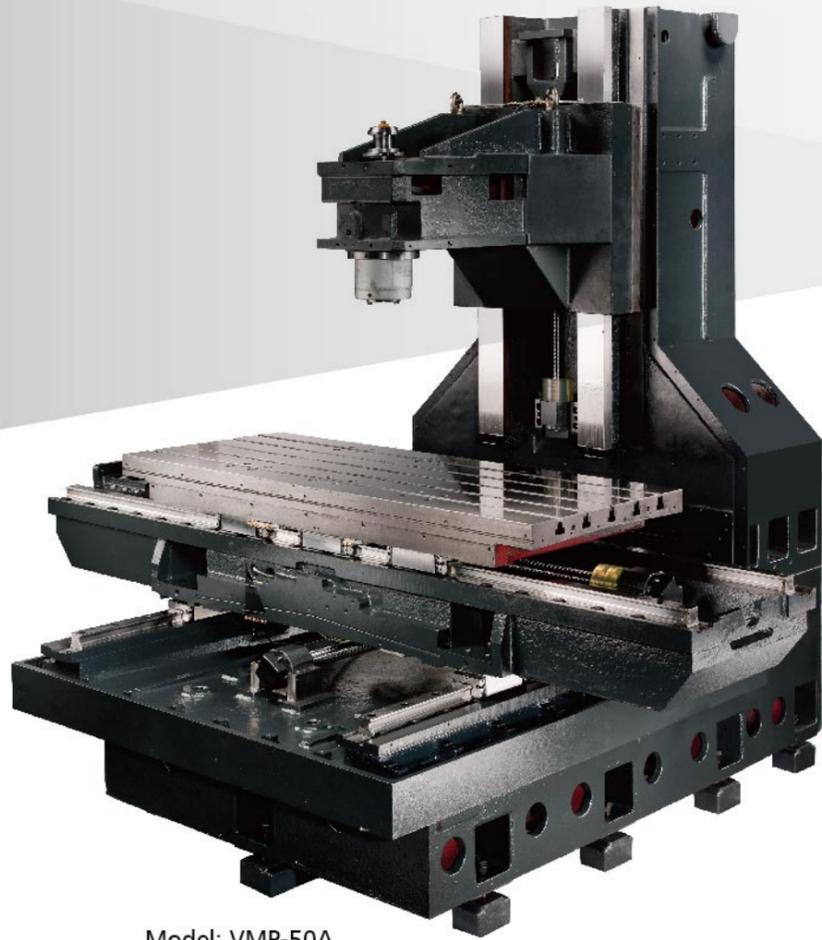


Model: VMP-50A

## RUGGED CONSTRUCTION ASSURES OPTIMUM RIGIDITY AND STABILITY

- The machine structure and major parts are manufactured from Meehanite cast iron for outstanding material stability and assures long-term deformation-free performance.
- The entire machine construction is subjected to ANSYS and NASTRAN Finite Element Analysis to achieve optimum rigidity and stability.
- The column bottom is specially designed with A-shaped structure. (Except VMP23.30)
- Outstanding machine structure, combined with high speed servo system, allows rapid traverse up to 40 m/min.
- Servomotor directly drives ballscrew. Ballscrews are pretensioned, ensuring rigidity and accuracy required for the feed transmission system.
- Boxways for Z axis are coated with low friction Turcite B, providing increased cutting rigidity. (Except VMP23.30)
- 634mm span of guideways on Y-axis and 370mm span on Z-axis guarantee superior stability for saddle and spindle head travel.

**Rear mounted Y-axis servo motor for increased maintenance space.**

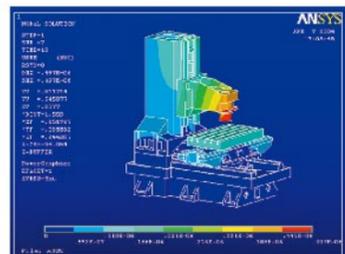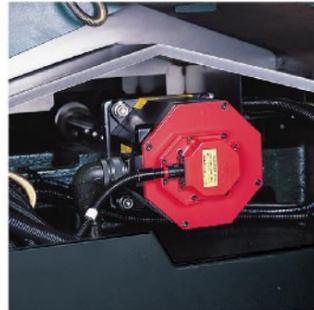



## FEM ANALYSIS

FEELER'S machine structure is designed and analyzed using advanced Finite Element Analysis software for dynamic simulation and structural analysis. This design method assures optimum structural rigidity, machine accuracy and reliability.



## PRECISION BALLSCREWS

Pretensioned ballscrews on X, Y, Z axes ensure accuracy and eliminate positioning error.

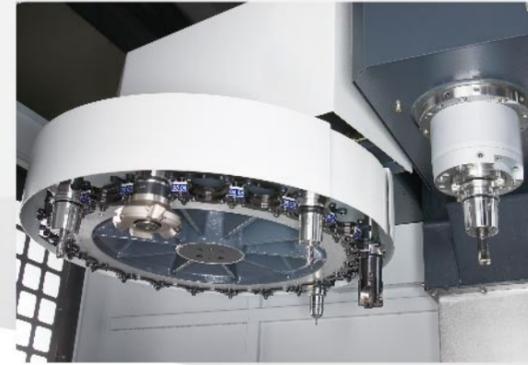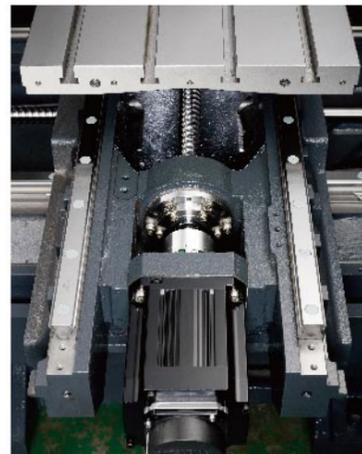

## Carrousel Type ATC

The carrousel type tool changer-with capacity of 22 tools to meet flexible machining requirements for molds and parts production.




## Dependable, Efficient ATC

FEELER'S ATC designs are all subjected to 1 million cycles of continuous tests for durability and stability to assure maximum dependability of operational performance.



## 10,000 RPM SPINDLE

The belt-drive spindle specially-designed bearing layout ensures maximum spindle rigidity. ( Spindles at 10,000rpm and 12,000rpm are available as optional.)

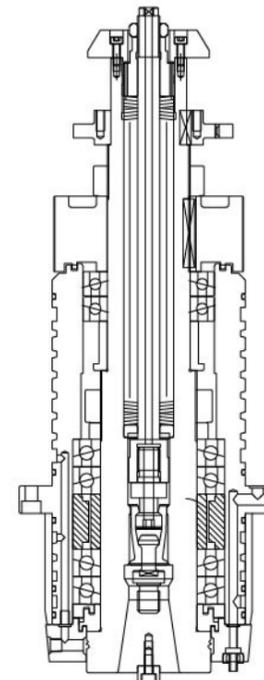


## Cutting Capacity Example

Workpiece Material: Medium Carbon Steel (S45C)


Machining Types		
Drilling	Tapping	Face Milling
Tool Diam. (mm) x Feed (mm/rev)	Tool Diam. (mm) x Pitch (mm/rev)	Width (mm) x Depth (mm) x Feed (mm/min)
Ø40 x 0.1	M24 x 3.0	308 c.c. 80 x 3.5 x 1100

# Pragmatic Operational Features

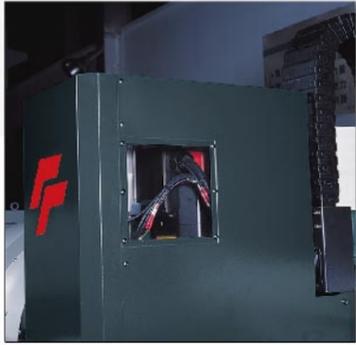

## SEE-THROUGH WINDOW

The additional see-through window on the spindle head cover provides convenient checking and maintenance.

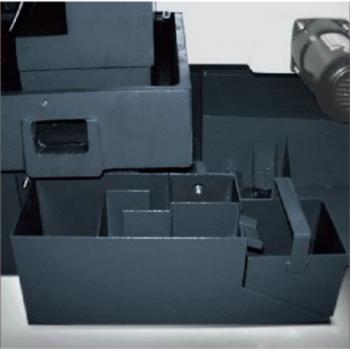

## OIL / COOLANT SEPARATION DEVICE


Mounted at the side of the base, the oil/coolant separation device does not require additional leveling adjustment.



**VMP-45/50 rear side chip conveyor**  
VMP 45/50: 265L (Rear side position).

## CHIP CONVEYOR (opt.)

- Chip conveyor of VMP series is with left side discharge (right side discharge is available upon request).
- VMP32A/40A's chip conveyor is placed in front side with left side discharge, please refer to above drawing.
- VMP23A/30A/45A/50A's chip conveyor is placed in the rear side of machine with left side discharge.

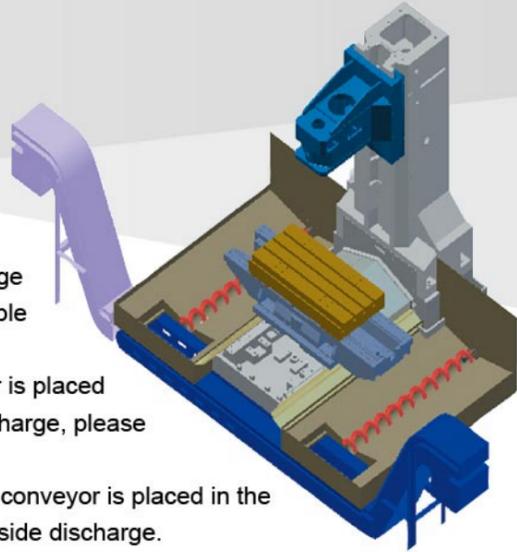

**VMP-30 Rear Side Coolant Tank**



**VMP-40 Coolant Tank**  
VMP 32/40: 300L (Front side position)



Air-gun fittings for your convenience. (opt.)



Powerful flushing system can quickly and efficiently remove metal chips. (opt.)



Hydraulic interface for APC model. (opt.)



# VARIOUS ADVANCED CNC CONTROLLERS TO CHOOSE FROM



FANUC Oi SERIES



MITSUBISHI M70



HEIDENHAIN iTNC 530



SIEMENS 828D

## An Innovative Structural Design that Allows for Many Options

### Mold Machining Package (OPT)

- 10,000 rpm spindle speed (Ceramic Bearing)
- 15/18.5 kW spindle power (Except VMP-23A/30A)
- 12 (24) m/min. rapid traverse on X / Y / Z-axis
- AICC + Data Server + Ethernet
- Servomotor upgrade

### Precision Mold Machining Package (OPT)

- 10,000 rpm spindle speed (Ceramic Bearing)
- 15/18.5 kW spindle power (Except VMP-23A/30A)
- 12 (24) m/min. rapid traverse on X / Y / Z-axis
- 12,000 / 15,000 rpm DDS. spindle (Except VMP-23A/30A)
- Z-axis roller type linear guide
- HPCC+Data Servo + Ethernet + Manual guide i
- Jerk Control + Machining Conditions selection: 10-step speed change
- Servomotor upgrade
- Rear cover


### INTELLIGENT PARAMETER ADJUSTMENT FUNCTION

The NC automatically evaluates and executes parameter compensation according to the machining condition.

#### 1. BEFORE COMPENSATION

#### 1. BEFORE COMPENSATION


Sharp point occurs during quadrant change.



R:30.000  
X:-62.7703  
Y:-133.439  
G:200.0  
Z:1.0

#### 2. DURING COMPENSATION


The intelligent parameter adjustment function eliminates the sharp points on quadrants.





R:30.000  
X:-82.4318  
Y:-100.6711  
G:200.0  
Z:1.0

#### 3. AFTER COMPENSATION

Circularity accuracy is greatly elevated.



R:30.000  
X:-3.7881  
Y:-172.7606  
G:200.0  
Z:1.0

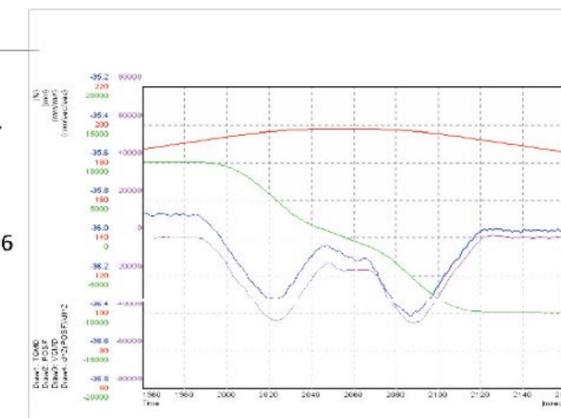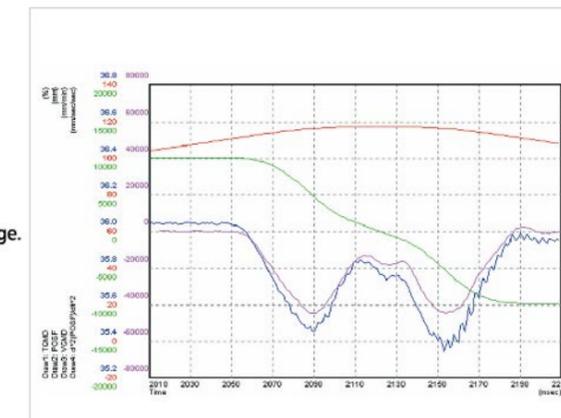




## SERVO SYSTEM ADJUSTMENT AND OPTIMIZATION

The servo system can be adjusted to an optimum condition according to the signals from each axis movement. This provides:

- Increased servo system rigidity.
- Reduced machine vibration.
- Reduced machining time.
- Optimization for acceleration/deceleration time before and after interpolation.

This function meets the rigorous requirements of surface roughness and smoothness for the mold-making industry. Also, it greatly reduces machining time for maximum efficiency.

- BLUE CURVE: Torque command
- RED CURVE: Position
- GREEN CURVE: Speed
- PURPLE CURVE: Acceleration

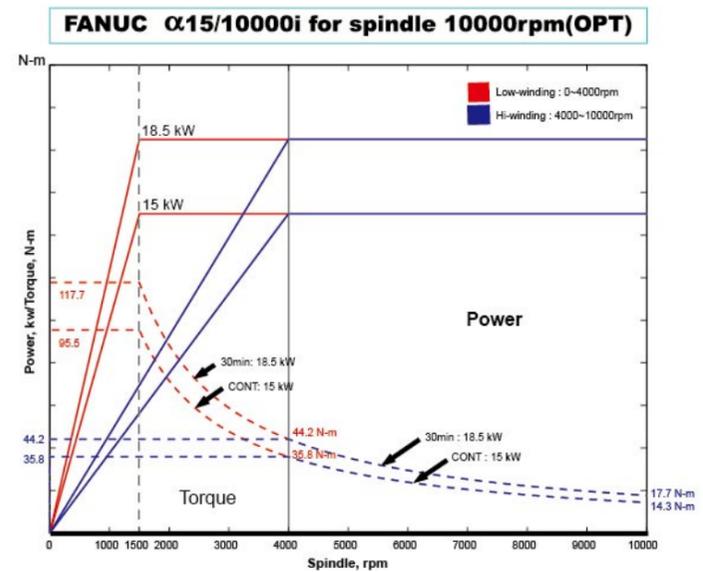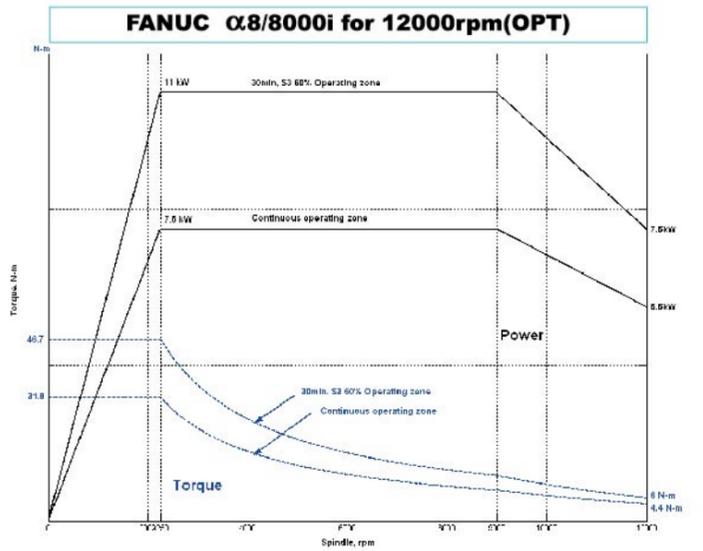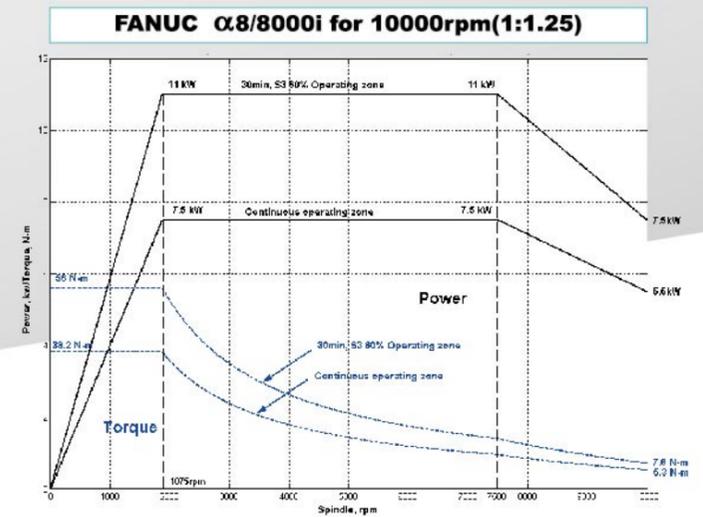

# VMP MACHINE SPECIFICATIONS

MODEL	Unit	VMP-23(A)	VMP-23A-APC	VMP-30(A)	VMP-32(A)	VMP-32A-APC	VMP-40(A)	VM-45S(A)	VMP-45(A)		VMP-50(A)			
TRAVEL										BT40	BT50	BT40	BT50	
X - axis travel	mm	580	580	760	820	800	1,020	1,100	1,100		1,300			
Y - axis travel	mm	420	420	420	520	520	520	700	610		610			
Z - axis travel	mm	510	510	510	505	505	505	600	600		600			
Spindle nose to table surface	mm	80 ~ 590	135 ~ 645	80-590	100 ~ 605	148 ~ 653	80 ~ 585	200 ~ 800	135 ~ 735		120 ~ 720			
Spindle center to column surface	mm	455	455	455	560	560	560	770	660		660			
Table surface to floor	mm	820	915	820	920	1025	940	950	960		975			
Table center to column surface	mm	245 ~ 665	245 ~ 665	245 ~ 665	300 ~ 820	300 ~ 820	300 ~ 820	420 ~ 1,120	355 ~ 965		355 ~ 965			
TABLE														
Table dimensions	mm	650 x 420	580 x 410	890 x 420	950 x 520	700 x 500	1,150 x 520	1,300 x 700	1,200 x 600		1,420 x 600			
Maximum load	kg	300	120	300	800	200	800	1,000	1,500		1,500			
T - slot	mm	14 x 4 x 100	35-M12xP1.75	14mm x 4 x 100	18 x 5 x 100	35-M16 x P2.0	18 x 5 x 100	18 x 5 x 125	18 x 5 x 100		18 x 5 x 100			
SPINDLE														
Spindle speed	rpm	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	4,000	10,000	4,000		
Spindle taper	type	7/24 taper No.40	7/24 taper No.40	7 / 24 taper No.40	7/24 taper No.40	7/24 taper No.40	7/24 taper No.40	7/24 taper No.40	7/24 taper No.40	7/24 taper No.50	7/24 taper No.40	7/24 taper No.50		
Spindle power	kW	7.5 / 11	7.5 / 11	7.5 / 11	7.5 / 11	7.5 / 11	7.5 / 11	6 / 11	7.5 / 11		7.5 / 11			
FEEDRATE														
X - axis rapid traverse	m / min	36	36	36	40	40	40	24	36		36			
Y - axis rapid traverse	m / min	36	36	36	40	40	40	24	36		36			
Z - axis rapid traverse	m / min	36	36	36	30	30	30	15	24		24			
ATC														
Tool changing time (tool-to-tool)	Carousel type	7 sec / 60 Hz, 7.1 sec / 50 Hz		No	7sec / 60Hz, 7.1sec / 50Hz		7 sec / 60 Hz, 7.1 sec / 50 Hz		7 sec / 60 Hz, 7.1 sec / 50 Hz		7 sec / 60 Hz, 7.1 sec / 50 Hz		7 sec / 60 Hz, 7.1 sec / 50 Hz	
	Arm type	1.7 sec / 60 Hz, 2.0 sec / 50 Hz		1.7 sec / 60 Hz, 2.0 sec / 50 Hz	1.7 sec / 60 Hz, 2.0 sec / 50 Hz		1.7 sec / 60 Hz, 2.0 sec / 50 Hz		1.7 sec / 60 Hz, 2.0 sec / 50 Hz		1.7 sec / 60 Hz, 2.0 sec / 50 Hz		1.7 sec / 60 Hz, 2.0 sec / 50 Hz	
Tool changer		Carrousel (Arm)		Arm	Carrousel (Arm Type)		Carrousel (Arm)		Carrousel (Arm)		Carrousel (Arm)		Carrousel (Arm)	
No. of tools	type	18 (20)		20	18 (20)		22 (24)		22 (24)		24		24	
Pull stud		P-40T (45°)		P-40T (45°)	P - 40T (45°)		P-40T (45°)		P-40T (45°)		P-40T (45°)		P-50T (45°)	
Max. tool weight	kg	7		7	7		8		7		8		15	
Max. tool length	mm	250		250	300		300		250		300		350	
Max. tool diameter	mm	Ø80		Ø80	Ø80		Ø80		Ø80		Ø80		Ø100	
Max. Tool diameter (no adjacent tool)	mm	Ø130		Ø130	Ø130		Ø150		Ø150		Ø150		Ø200	
OTHERS														
Floor space	mm	1,900 x 2,255		1,900 x 2,630	2,100 x 2,255		2,905 x 2,260		3,440 x 2,630		3,180 x 2,750		3,550 x 2,750	
Machine weight	kg	3,000		3,900	3,300		5,800		7,500		6,300		9,000	
Max. machine height	mm	2,370		2,520	2,370		2,800		2,950		2,800		3,000	
Power capacity	KVA	20		20	20		25		25		25		25	
Air source	kg/cm <sup>2</sup>	6-8		6~8	6 ~ 8		6 ~ 8		6-8		6-8		6-8	

- ### STANDARD ACCESSORIES
- Heat exchanger
  - 3 axes pretensioned ballscrews
  - Clamping / unclamping device
  - Automatic lubrication system
  - Fully enclosed splash guard
  - Dust-proof electrical cabinet
  - Spindle air sealing
  - 3-color signal light
  - Rigid tapping
  - Leveling blocks and plates
  - Spindle coolant nozzle
  - Operation and maintenance manual

- ### OPTIONAL ACCESSORIES
- 3 axes linear scales
  - Coolant through spindle
  - Workpiece measurement system
  - Automatic tool length measurement and breakage detection
  - Chip conveyor
  - Chip screw
  - Spindle oil cooler
  - Flushing system + coolant gun
  - Front flushing (VMP45/50)
  - Top roof
  - 4th axis preparation or rotary table
  - High pressure pump
  - Auto power off
  - Rear cover
  - 12,000rpm Belt type spindle BT-40
  - 10,000rpm DDS spindle
  - 12,000/15,000rpm DDS spindle
  - Z Travel 635mm (VMP-32/40)

\* APC changing time: 6 seconds/ VMP-23A-APC, 10 Seconds/ VMP32A-APC.

\* Specifications and design characteristics are subject to change without prior notice.

( Controller : Fanuc / Mitsubishi )

( Controller : Fanuc / Mitsubishi )

## Machine Dimensions, Table Dimensions and Working Capacity

